

Please note that the standard Michelin load/inflation charts have been altered for RV usage only.

<b>S = 1 tire on 1 side</b> of single axle	<b>[-----]</b> Single Axle
<b>D = 2 tires on 1 side</b> of dual axle	<b>[[-----]]</b> Dual Axle
<b>For Tag axle, use applicable Single or Dual chart</b>	

## WHEEL DIAMETER - 16"

### 7.50R16 LRD - ALL TIRES

PSI		35	40	45	50	55	60	65				
Lbs per	<b>S</b>	1620	1770	1930	2060	2190	2310	2440				
Position	<b>D</b>	2860	3130	3380	3630	3860	4080	4280				
Kg. per	<b>S</b>	735	805	875	935	995	1050	1105				
Position	<b>D</b>	1295	1420	1535	1645	1750	1850	1940				

### LT215/85R16 LRD - ALL TIRES

PSI		35	40	45	50	55	60	65				
Lbs per	<b>S</b>	1495	1640	1785	1940	2050	2180	2335				
Position	<b>D</b>	2720	2980	3250	3530	3730	3970	4300				
Kg. per	<b>S</b>	680	745	810	880	930	990	1060				
Position	<b>D</b>	1235	1350	1475	1600	1690	1800	1950				

### LT215/85R16 LRE - ALL TIRES

PSI		35	40	45	50	55	60	65	70	75	80		
Lbs per	<b>S</b>	1495	1640	1785	1940	2050	2180	2335	2430	2550	2680		
Position	<b>D</b>	2720	2980	3250	3530	3730	3970	4300	4420	4640	4940		
Kg. per	<b>S</b>	680	745	810	880	930	990	1060	1100	1155	1215		
Position	<b>D</b>	1235	1350	1475	1600	1690	1800	1950	2005	2105	2240		

### LT235/85R16 LRE - ALL TIRES

PSI		35	40	45	50	55	60	65	70	75	80		
Lbs per	<b>S</b>	1700	1870	2030	2205	2335	2485	2623	2765	2905	3042		
Position	<b>D</b>	3090	3400	3690	4015	4250	4520	4765	5030	5290	5556		
Kg. per	<b>S</b>	770	845	920	1000	1060	1125	1190	1255	1320	1380		
Position	<b>D</b>	1400	1540	1675	1820	1930	2050	2160	2280	2400	2520		

## WHEEL DIAMETER - 16" (Continued)

### LT225/75R16 LRE - ALL TIRES

PSI		35	40	45	50	55	60	65	70	75	80		
Lbs per	S	1500	1650	1790	1940	2060	2190	2335	2440	2560	2680		
Position	D	2730	3000	3260	3530	3750	3990	4300	4440	4510	4940		
Kg. per	S	680	750	810	880	935	995	1060	1105	1160	1215		
Position	D	1240	1360	1480	1600	1700	1810	1950	2015	2115	2240		

### LT245/75R16 LRE - ALL TIRES

PSI		35	40	45	50	55	60	65	70	75	80		
Lbs per	S	1700	1865	2030	2205	2335	2480	2623	2675	2900	3042		
Position	D	3090	3390	3690	4012	4250	4510	4762	5030	5280	5556		
Kg. per	S	770	845	920	1000	1060	1125	1190	1255	1320	1380		
Position	D	1400	1540	1675	1820	1930	2045	2160	2280	2400	2520		

## WHEEL DIAMETER - 16.5"

### 8.75R16.5 LRE - ALL TIRES

PSI		45	50	55	60	65	70	75					
Lbs per	S	1680	1840	2005	2165	2350	2515	2680					
Position	D	3195	3500	3810	4115	4460	4780	5100					
Kg. per	S	760	835	910	980	1065	1140	1215					
Position	D	1450	1585	1725	1865	2025	2170	2315					

### 9.50R16.5 LRE - ALL TIRES

PSI		45	50	55	60	65	70	75	80				
Lbs per	S	1875	2055	2240	2420	2625	2780	2975	3170				
Position	D	3575	3915	4260	4605	5000	5280	5650	6020				
Kg. per	S	850	930	1015	1095	1190	1260	1350	1440				
Position	D	1620	1775	1930	2090	2265	2395	2565	2730				

## WHEEL DIAMETER - 17"

### 7.50R17 LRD - ALL TIRES

PSI		45	50	55	60	65	70	75					
Lbs per	S	1775	1955	2120	2280	2460	2645	2800					
Position	D	3485	3785	4105	4415	4775	5065	5320					
Kg. per	S	805	885	960	1035	1115	1200	1270					
Position	D	1580	1715	1860	2005	2165	2295	2415					

Please note that the standard Michelin load/inflation charts have been altered for RV usage only.

<b>S = 1 tire on 1 side</b> of single axle	<b>[-----]</b> Single Axle
<b>D = 2 tires on 1 side</b> of dual axle	<b>[[-----]]</b> Dual Axle
<b>For Tag axle, use applicable Single or Dual chart</b>	

## WHEEL DIAMETER - 19.5

### 8R19.5 LRF - ALL TIRES

PSI		70	75	80	85	90						
lbs per	<b>S</b>	2800	2975	3170	3325	3500						
position	<b>D</b>	5400	5740	6100	6415	6750						
kg. per	<b>S</b>	1270	1350	1440	1508	1587						
position	<b>D</b>	2450	2450	2767	2908	3063						

### 8R19.5 LRF - ALL TIRES (NEW MARKINGS – see Technical Bulletin on page 12)

PSI		70	75	80	85	90	95	100	105	110		
lbs per	<b>S</b>	2540	2680	2835	2955	3075	3195	3305	3415	3525		
position	<b>D</b>	4920	5140	5360	5570	5780	6000	6200	6400	6610		
kg. per	<b>S</b>	1150	1220	1285	1340	1400	1450	1500	1550	1600		
position	<b>D</b>	2240	2340	2430	2520	2620	2720	2820	2920	3000		

### 225/70R19.5 LRF (1) XZA

PSI		70	75	80	85							
Lbs per	<b>S</b>	3040	3220	3405	3640							
Position	<b>D</b>	5840	6170	6500	6830							
Kg. per	<b>S</b>	1379	1461	1545	1650							
Position	<b>D</b>	2649	2798	2948	3100							

### 225/70R19.5 LRF (2) XRV

PSI		70	75	80	85	90	95					
Lbs per	<b>(S)</b>	(2895)	(3040)	(3195)	(3315)	(3450)	(3640)					
Position	<b>(D)</b>	(5440)	(5720)	(6000)	(6230)	(6490)	(6830)					
Kg. per	<b>(S)</b>	(1313)	(1379)	(1450)	(1503)	(1565)	(1650)					
Position	<b>(D)</b>	(2467)	(2595)	(2722)	(2826)	(2944)	(3100)					

### 225/70R19.5 LRF – ALL TIRES (NEW MARKINGS – see Technical Bulletin on page 12)

PSI		65	70	75	80	85	90	95				
lbs per	<b>S</b>	2755	2895	3040	3195	3315	3450	3640				
position	<b>D</b>	5200	5440	5720	6000	6230	6490	6830				
kg. per	<b>S</b>	1250	1310	1380	1450	1500	1570	1650				
position	<b>D</b>	2360	2460	2600	2720	2820	2940	3100				

# WHEEL DIAMETER - 19.5” (continued)

## 225/70R19.5 LRG – ALL TIRES

PSI		65	70	75	80	85	90	95	100	105	110		
lbs per	S	2755	2895	3040	3195	3315	3450	3640	3715	3845	3970		
position	D	5200	5440	5720	6000	6230	6490	6830	6980	7230	7500		
kg. per	S	1250	1310	1380	1450	1500	1570	1650	1690	1740	1800		
position	D	2360	2460	2600	2720	2820	2940	3100	3160	3280	3400		

## 245/70R19.5 LRF - XZA, XZE

PSI		70	75	80	85	90							
lbs per	S	3540	3640	3740	3890	4080							
position	D	6630	6830	7030	7310	7720							
kg. per	S	1605	1651	1696	1765	1850							
position	D	3007	3098	3189	3316	3502							

## 245/70R19.5 LRF - XRV

PSI		70	75	80	85	90	95						
Lbs per	S	3440	3540	3640	3740	3890	4080						
Position	D	6430	6630	6830	7030	7310	7720						
Kg. per	S	1560	1605	1651	1697	1764	1850						
Position	D	2916	3007	3098	3189	3316	3500						

## 245/70R19.5 LRF – ALL TIRES (NEW MARKINGS – see Technical Bulletin on page 12)

PSI		80	85	90	95								
Lbs per	S	3640	3740	3890	4080								
Position	D	6830	7030	7310	7720								
Kg. per	S	1650	1700	1770	1850								
Position	D	3100	3180	3320	3500								

## 245/70R19.5 LRG (1) - XZA

PSI		70	75	80	85	90	95	100	105	110			
Lbs per	S	3240	3450	3660	3850	4035	4220	4415	4610	4940			
Position	D	6100	6485	6880	7270	7665	8050	8390	8735	9350			
Kg. per	S	1468	1565	1660	1746	1830	1914	2001	2090	2240			
Position	D	2766	2942	3120	3298	3477	3651	3807	3962	4240			

## 245/70R19.5 LRG - (2) XZE

PSI		70	75	80	85	90	95	100	105	110			
Lbs per	S	3540	3640	3740	3890	4080	4220	4415	4610	4805			
Position	D	6630	6830	7030	7310	7720	8500	8400	8750	9080			
Kg. per	S	1606	1651	1696	1765	1851	1914	2003	2091	2179			
Position	D	3007	3098	3189	3316	3502	3855	3810	3969	4118			

## 245/70R19.5 LRG – ALL TIRES (NEW MARKINGS – see Technical Bulletin on page 12)

PSI		80	85	90	95	100	105	110					
Lbs per	S	3640	3740	3890	4080	4190	4335	4540					
Position	D	6830	7030	7310	7720	7880	8150	8600					
Kg. per	S	1650	1700	1770	1850	1900	1970	2060					
Position	D	3100	3180	3320	3500	3580	3700	3900					

## 245/70R19.5 LRH – ALL TIRES

PSI		75	80	85	90	95	100	105	110	115	120		
Lbs per	S	3390	3570	3750	3925	4100	4270	4440	4610	4775	4940		
Position	D	6420	6760	7100	7430	7760	8080	8400	8720	9040	9350		
Kg. per	S	1540	1610	1700	1770	1860	1930	2000	2090	2150	2240		
Position	D	2920	3060	3220	3360	3520	3660	3780	3960	4080	4240		

Please note that the standard Michelin load/inflation charts have been altered for RV usage only.

<b>S = 1 tire on 1 side</b> of single axle	<b>[-----]</b> Single Axle
<b>D = 2 tires on 1 side</b> of dual axle	<b>[[-----]]</b> Dual Axle
<b>For Tag axle, use applicable Single or Dual chart</b>	

## WHEEL DIAMETER - 22.5"

### 9R22.5 LRF - ALL TIRES

PSI		75	80	85	90	95						
Lbs per	<b>S</b>	3700	3915	4050	4310	4540						
Position	<b>D</b>	6950	7345	7670	8100	8600						
kg. per	<b>S</b>	1679	1775	1837	1954	2060						
position	<b>D</b>	3152	3330	3479	3674	3900						

### 9R22.5 LRF - ALL TIRES (NEW MARKINGS – see Technical Bulletin on page 12)

PSI		70	75	80	85	90	95	100	105			
Lbs per	<b>S</b>	3370	3560	3730	3890	4080	4235	4390	4540			
Position	<b>D</b>	6540	6820	7100	7380	7720	8010	8300	8600			
kg. per	<b>S</b>	1530	1610	1690	1760	1850	1920	1990	2060			
position	<b>D</b>	2960	3100	3220	3340	3500	3640	3780	3900			

### 10R22.5 LRF - ALL TIRES

PSI		75	80	85	90	95						
lbs per	<b>S</b>	4255	4490	4725	4965	5150						
position	<b>D</b>	7830	8265	8695	9135	9480						
kg. per	<b>S</b>	1930	2037	2143	2251	2336						
position	<b>D</b>	3551	3747	3945	4143	4300						

### 10R22.5 LRF - ALL TIRES (NEW MARKINGS – see Technical Bulletin on page 12)

PSI		70	75	80	85	90	95	100				
lbs per	<b>S</b>	4080	4280	4480	4675	4850	5025	5205				
position	<b>D</b>	7720	8090	8460	8820	9170	9520	9880				
kg. per	<b>S</b>	1850	1940	2030	2120	2200	2280	2360				
position	<b>D</b>	3500	3660	3820	4000	4160	4320	4480				

### 10R22.5 LRG - ALL TIRES

PSI		75	80	85	90	95	100	105				
lbs per	<b>S</b>	4255	4490	4725	4965	5150	5600	5680				
position	<b>D</b>	7830	8265	8695	9135	9480	9990	10160				
kg. per	<b>S</b>	1930	2037	2143	2251	2336	2540	2575				
position	<b>D</b>	3551	3748	3945	4143	4300	4531	4600				

### 10R22.5 LRG - ALL TIRES (NEW MARKINGS – see Technical Bulletin on page 12)

PSI		70	75	80	85	90	95	100	105	110	115	
lbs per	<b>S</b>	4080	4280	4480	4675	4850	5025	5205	5360	5515	5675	
position	<b>D</b>	7720	8090	8460	8820	9170	9520	9880	10150	10420	10710	
kg. per	<b>S</b>	1850	1940	2030	2120	2200	2280	2360	2430	2500	2575	
position	<b>D</b>	3500	3660	3820	4000	4160	4320	4480	4600	4720	4860	

## WHEEL DIAMETER - 22.5" (continued)

### 11R22.5 LRG - ALL TIRES

PSI		75	80	85	90	95	100					
lbs per	S	4695	4950	5215	5470	5755	6175					
position	D	8500	8900	9300	9850	10600	11500					
kg. per	S	2129	2245	2365	2481	2610	2800					
position	D	3856	4037	4218	4468	4808	5217					

### 11R22.5 LRG - ALL TIRES (NEW MARKINGS – see Technical Bulletin on page 12)

PSI		70	75	80	85	90	95	100	105			
lbs per	S	4530	4770	4990	5220	5510	5730	5950	6175			
position	D	8760	9160	9520	9900	10410	10830	11250	11680			
kg. per	S	2050	2160	2260	2370	2500	2600	2700	2800			
position	D	3980	4160	4320	4500	4720	4920	5120	5300			

### 11R22.5 LRH - ALL TIRES

PSI		75	80	85	90	95	100	105	110	115		
lbs per	S	4695	4950	5215	5470	5755	6175	6245	6430	6610		
position	D	8450	8910	9385	9845	10360	11350	11555	11760	11900		
kg. per	S	2129	2245	2365	2481	2610	2800	2833	2915	3000		
position	D	3832	4041	4256	4465	4698	5147	5240	5335	5400		

### 11R22.5 LRH - ALL TIRES (NEW MARKINGS – see Technical Bulletin on page 12)

PSI		70	75	80	85	90	95	100	105	110	115	120
lbs per	S	4530	4770	4990	5220	5510	5730	5950	6175	6320	6465	6610
position	D	8760	9160	9520	9900	10410	10830	11250	11680	11790	11900	12010
kg. per	S	2050	2160	2260	2370	2500	2600	2700	2800	2870	2940	3000
position	D	3980	4160	4320	4500	4720	4920	5120	5300	5360	5420	5450

### 12R22.5 LRH - ALL TIRES

PSI		75	80	85	90	95	100	105	110	115		
Lbs per	S	4990	5280	5570	5870	6155	6455	6740	7030	7390		
Position	D	8850	9350	9900	10400	11000	11600	12200	12800	13500(1)		
Kg. per	S	2264	2395	2527	2663	2792	2928	3057	3189	3350		
Position	D	4015	4241	4491	4718	4989	5262	5534	5806	6125		

(1) Except 12R22.5 XDN. \* Not applicable for motorhome use

### 12R22.5 LRH - ALL TIRES (NEW MARKINGS – see Technical Bulletin on page 12)

PSI		70	75	80	85	90	95	100	105	110	115	120
Lbs per	S	4940	5200	5450	5690	6005	6205	6405	6610	6870	7130	7390
Position	D	9560	9980	10380	10780	11350	11570	11790	12010	12530	13050	13560
Kg. per	S	2240	2360	2470	2580	2725	2820	2910	3000	3120	3240	3350
Position	D	4340	4520	4700	4880	5150	5260	5360	5450	5680	5920	6150

### 235/80R22.5 LRG (1) - XZE

PSI		75	80	85	90							
lbs per	S	4035	4280	4545	4675							
position	D	7630	8070	8555	8820							
kg. per	S	1830	1940	2060	2120							
Position	D	3460	3660	3880	4000							

Please note that the standard Michelin load/inflation charts have been altered for RV usage only.

<b>S = 1 tire on 1 side</b> of single axle	[-----] Single Axle
<b>D = 2 tires on 1 side</b> of dual axle	[[-----]] Dual Axle
<b>For Tag axle, use applicable Single or Dual chart</b>	

**235/80R22.5 LRG (2) - XRV**

PSI		75	80	85	90	95	100						
Lbs per	<b>S</b>	3595	3815	4035	4280	4545	4675						
Position	<b>D</b>	6790	7190	7630	8070	8555	8820						
Kg. per	<b>S</b>	1629	1730	1830	1940	2060	2120						
Position	<b>D</b>	3080	3260	3460	3660	3880	4000						

**235/80R22.5 – ALL TIRES (NEW MARKINGS – see Technical Bulletin on page 12)**

PSI		65	70	75	80	85	90	95	100	105	110		
Lbs per	<b>S</b>	3070	3255	3440	3625	3805	3980	4160	4330	4505	4675		
Position	<b>D</b>	5790	6140	6490	6840	7180	7510	7840	8170	8500	8820		
Kg. per	<b>S</b>	1390	1470	1560	1640	1730	1800	1890	1960	2030	2120		
Position	<b>D</b>	2640	2760	2960	3080	3260	3400	3580	3700	3840	4000		

**255/80R22.5 LRG (1) - XZE**

PSI		75	80	85	90	95							
Lbs per	<b>S</b>	4235	4465	4710	4960	5205							
Position	<b>D</b>	7820	8270	8710	9150	9620							
Kg. per	<b>S</b>	1921	2025	2137	2250	2360							
Position	<b>D</b>	3547	3752	3951	4151	4360							

**255/80R22.5 LRG (2) - XRV**

PSI		75	80	85	90	95	100	105					
Lbs per	<b>S</b>	3750	4000	4235	4465	4710	4960	5205					
Position	<b>D</b>	6935	7390	7820	8270	8710	9150	9620					
Kg. per	<b>S</b>	1702	1815	1921	2025	2137	2250	2360					
Position	<b>D</b>	3147	3352	3547	3752	3951	4151	4360					

**255/80R22.5 LRG – ALL TIRES (NEW MARKINGS – see Technical Bulletin on page 12)**

PSI		70	75	80	85	90	95	100	105	110			
Lbs per	<b>S</b>	3875	4070	4300	4440	4620	4805	4975	5150	5205			
Position	<b>D</b>	7050	7410	7720	8080	8410	8820	9050	9370	9610			
Kg. per	<b>S</b>	1760	1850	1950	2010	2100	2180	2260	2340	2360			
Position	<b>D</b>	3200	3360	3500	3660	3820	4000	4100	4260	4360			

# WHEEL DIAMETER - 22.5" (continued)

## 255/70R22.5 LRH - ALL TIRES

PSI		75	80	85	90	95	100	105	110	115		
Lbs per	S	3810	4025	4235	4450	4655	4805	5000	5275	5510		
Position	D	7045	7425	7810	8195	8560	8840	9080	9705	10140		
Kg. per	S	1728	1825	1921	2017	2110	2180	2268	2391	2500		
Position	D	3195	3368	3543	3716	3883	4010	4118	4401	4600		

## 255/70R22.5 LRH - ALL TIRES (NEW MARKINGS – see Technical Bulletin on page 12)

PSI		80	85	90	95	100	105	110	115	120		
Lbs per	S	4190	4370	4550	4675	4895	5065	5205	5400	5510		
Position	D	7940	8220	8550	8820	8910	9220	9350	9830	10140		
Kg. per	S	1900	1980	2060	2120	2220	2300	2360	2450	2500		
Position	D	3600	3720	3880	4000	4040	4180	4240	4460	4600		

## 275/80R22.5 LRG - ALL TIRES

PSI		75	80	85	90	95	100					
Lbs per	S	4825	5090	5365	5625	5920	6175					
Position	D	8700	9175	9665	10140	10670	11350					
Kg. per	S	2189	2309	2433	2551	2685	2801					
Position	D	3946	4162	4384	4600	4840	5150					

## 275/80R22.5 LRG - ALL TIRES (NEW MARKINGS – see Technical Bulletin on page 12)

PSI		70	75	80	85	90	95	100	105	110		
Lbs per	S	4500	4725	4940	5155	5370	5510	5780	5980	6175		
Position	D	8190	8600	9080	9380	9770	10140	10520	10880	11350		
Kg. per	S	2040	2140	2240	2340	2440	2500	2620	2710	2800		
Position	D	3720	3900	4120	4260	4440	4600	4780	4940	5150		

## 275/80R22.5 LRH - ALL TIRES

PSI		75	80	85	90	95	100	105	110	115		
Lbs per	S	4825	5090	5365	5625	5920	6175	6345	6615	6940		
Position	D	8700	9175	9665	10140	10670	11350	11560	11765	12350		
Kg. per	S	2189	2309	2433	2551	2685	2801	2878	3000	3150		
Position	D	3946	4162	4384	4600	4840	5148	5242	5336	5600		

## 275/80R22.5 LRH (XZA1) (NEW MARKINGS – see Technical Bulletin on page 12)

PSI		75	80	85	90	95	100	105	110	115	120	
Lbs per	S	5070	5310	5550	5840	6095	6350	6610	6790	6970	7160	
Position	D	9740	10140	10520	11020	11350	11680	12010	12410	12820	13220	
Kg. per	S	2300	2410	2520	2650	2770	2890	3000	3230	3160	3250	
Position	D	4420	4600	4780	5000	5160	5120	5450	5640	5820	6000	

## 275/80R22.5 LRH – (XZA2) (NEW MARKINGS – see Technical Bulletin on page 12)

PSI		70	75	80	85	90	95	100	105	110	115	120
Lbs per	S	4510	4765	5015	5265	5515	5755	6000	6235	6475	6710	6940
Position	D	8310	8780	9250	9710	10160	10610	11050	11490	11930	12360	12790
Kg. per	S	2030	2170	2270	2400	2490	2620	2720	2810	2940	3030	3150
Position	D	3740	3980	4180	4420	4600	4820	5000	5180	5400	5580	5800



# WHEEL DIAMETER - 22.5” (continued)

## 255/70R22.5 LRH - ALL TIRES

PSI		75	80	85	90	95	100	105	110	115		
Lbs per	S	3810	4025	4235	4450	4655	4805	5000	5275	5510		
Position	D	7045	7425	7810	8195	8560	8840	9080	9705	10140		
Kg. per	S	1728	1825	1921	2017	2110	2180	2268	2391	2500		
Position	D	3195	3368	3543	3716	3883	4010	4118	4401	4600		

## 255/70R22.5 LRH - ALL TIRES (NEW MARKINGS – see Technical Bulletin on page 12)

PSI		80	85	90	95	100	105	110	115	120		
Lbs per	S	4190	4370	4550	4675	4895	5065	5205	5400	5510		
Position	D	7940	8220	8550	8820	8910	9220	9350	9830	10140		
Kg. per	S	1900	1980	2060	2120	2220	2300	2360	2450	2500		
Position	D	3600	3720	3880	4000	4040	4180	4240	4460	4600		

## 275/80R22.5 LRG - ALL TIRES

PSI		75	80	85	90	95	100					
Lbs per	S	4825	5090	5365	5625	5920	6175					
Position	D	8700	9175	9665	10140	10670	11350					
Kg. per	S	2189	2309	2433	2551	2685	2801					
Position	D	3946	4162	4384	4600	4840	51					

## 275/80R22.5 LRG - ALL TIRES (NEW MARKINGS – see Technical Bulletin on page 12)

PSI		75	80	85	90	95	100	105	110	115		
Lbs per	S	4500	4725	4940	5155	5370	5510	5780	5980	6175		
Position	D	8190	8600	9080	9380	9770	10140	10520	10880	11350		
Kg. per	S	2040	2140	2240	2340	2440	2500	2620	2710	2800		
Position	D	3720	3900	4120	4260	4440	4600	4780	4940	5150		

## 275/80R22.5 LRH - ALL TIRES

PSI		75	80	85	90	95	100	105	110	115		
Lbs per	S	4825	5090	5365	5625	5920	6175	6345	6615	6940		
Position	D	8700	9175	9665	10140	10670	11350	11560	11765	12350		
Kg. per	S	2189	2309	2433	2551	2685	2801	2878	3000	3150		
Position	D	3946	4162	4384	4600	4840	5148	5242	5336	5600		

## 275/80R22.5 LRH (XZA1) (NEW MARKINGS – see Technical Bulletin on page 12)

PSI		75	80	85	90	95	100	105	110	115	120	
Lbs per	S	5070	5310	5550	5840	6095	6350	6610	6790	6970	7160	
Position	D	9740	10140	10520	11020	11350	11680	12010	12410	12820	13220	
Kg. per	S	2300	2410	2520	2650	2770	2890	3000	3230	3160	3250	
Position	D	4420	4600	4780	5000	5160	5120	5450	5640	5820	6000	

## 275/80R22.5 LRH – (XZA2) (NEW MARKINGS – see Technical Bulletin on page 12)

PSI		70	75	80	85	90	95	100	105	110	115	120
Lbs per	S	4510	4765	5015	5265	5515	5755	6000	6235	6475	6710	6940
Position	D	8310	8780	9250	9710	10160	10610	11050	11490	11930	12360	12790
Kg. per	S	2030	2170	2270	2400	2490	2620	2720	2810	2940	3030	3150
Position	D	3740	3980	4180	4420	4600	4820	5000	5180	5400	5580	5800

## WHEEL DIAMETER - 22.5” (continued)

### 315/80R22.5 LRL - ALL TIRES (NEW MARKINGS – see Technical Bulletin on page 12)

PSI		80	85	90	95	100	105	110	115	120	125	130
Lbs per	S	6165	6470	6770	7070	7370	7660	7950	8240	8530	8810	9090
Position	D	11220	11770	12320	12870	13400	13940	14480	15000	15520	16020	16540
Kg. per	S	2780	2940	3060	3220	3340	3450	3600	3720	3870	3980	4125
Position	D	5060	5340	5560	5860	6060	6280	6560	6760	7020	7240	7500

## FOR USE WITH 8.25” RIMS ONLY

### 315/80R22.5 LRL - ALL TIRES (NEW MARKINGS – see Technical Bulletin on page 12)

PSI		80	85	90	95	100	105	110	115	120		
Lbs per	S	5400	5715	6045	6405	6675	6995	7310	7630	8000		
Position	D	6750	7225	7725	8275	8800	9350	9900	10475	11225		
Kg. per	S	2450	2590	2740	2905	3030	3175	3315	3460	3605		
Position	D	3060	3275	3505	3755	3990	4240	4490	4750	5090		

## WHEEL DIAMETER - 24.5”

### 11R24.5 LRG - ALL TIRES

PSI		65	70	75	80	85	90	95	100			
Lbs per	S	4390	4705	4960	5235	5515	5780	6105	6430			
Position	D	7280	7985	8465	9070	9635	10245	10940	12000			
Kg. per	S	1991	2134	2250	2375	2501	2622	2769	2917			
Position	D	3302	3622	3840	4114	4371	4647	4963	5443			

### 11R24.5 LRG - ALL TIRES (NEW MARKINGS – see Technical Bulletin on page 12)

PSI		70	75	80	85	90	95	100	105			
Lbs per	S	4820	5070	5310	5550	5840	6095	6350	6610			
Position	D	9320	9740	10140	10520	11020	11350	11680	12010			
Kg. per	S	2190	2300	2410	2520	2650	2770	2890	3000			
Position	D	4220	4420	4600	4780	5000	5160	5320	5450			

### 11R24.5 LRH - ALL TIRES

PSI		65	70	75	80	85	90	95	100	105	110	115
lbs per	S	4455	4705	4960	5235	5515	5780	6105	6430	6630	6830	7030
position	D	7300	7985	8450	8910	9385	9845	10360	11580	11940	12300	12660
kg. per	S	2021	2134	2250	2375	2501	2622	2769	2917	3008	3098	3189
position	D	3310	3622	3832	4042	4257	4466	4700	5253	5416	5580	5743

### 11R24.5 LRH - ALL TIRES (NEW MARKINGS – see Technical Bulletin on page 12)


PSI		70	75	80	85	90	95	100	105	110	115	120
lbs per	S	4820	5070	5310	5550	5840	6095	6350	6610	6790	6970	7160
position	D	9320	9740	10140	10520	11020	11350	11680	12010	12410	12810	13220
kg. per	S	2190	2300	2410	2520	2650	2770	2890	3000	3080	3160	3250
position	D	4220	4420	4600	4780	5000	5160	5320	5450	5640	5820	6000

# Notes

# Notes

# Finally — A road atlas designed for the way you drive!

- Extensive North American Coverage
- Organized Geographically
- Driver-Friendly Michelin Quality Design
- 8 Bonus Large-Scale Maps
- Easy-to-Follow "Go To" Pointers
- Colorful, Precise and Clear Mapping

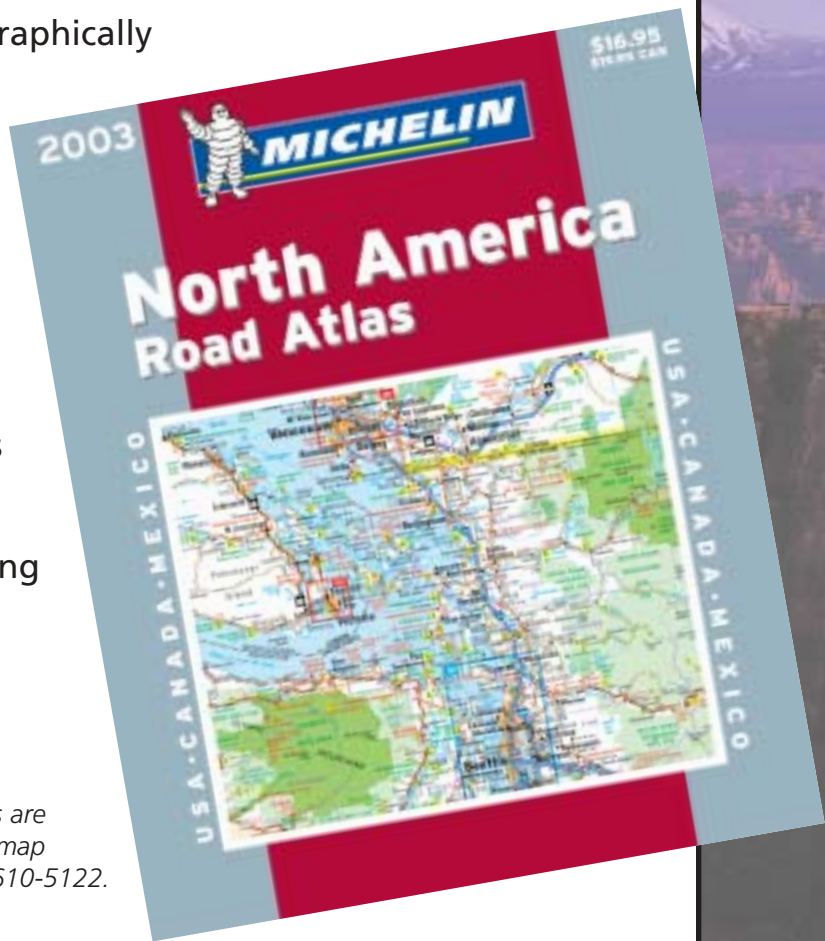

*Michelin Travel Publications are available at fine book and map stores or by calling 1-888-610-5122. [www.michelinman.com](http://www.michelinman.com)*



[www.michelin.com](http://www.michelin.com)

To place an order for additional brochures, call Promotional Fulfillment Center  
1-800-677-3322, Option #2

Monday through Friday, 9 a.m. to 6 p.m. Eastern Time

MICHELIN NORTH AMERICA (CANADA) INC.  
Laval, Quebec, Canada

MICHELIN NORTH AMERICA, INC.  
Greenville, South Carolina, USA

MICHELIN MEXICO S.A. DE C.V.  
Mexico City, Mexico